

MANISCOPIC

MRT 2150 **PRIVILEGE**




- Lift height : 20.60 m
- Max. reach : 18.10 m
- Engine : 150 HP - 110 kw
- 4 wheel drive - 4 wheel steer
- Hydrostatic transmission
- Levelling system




MANITOU


**ROTATION ON STABILISERS
FULLY EXTENDED WITH FORKS**

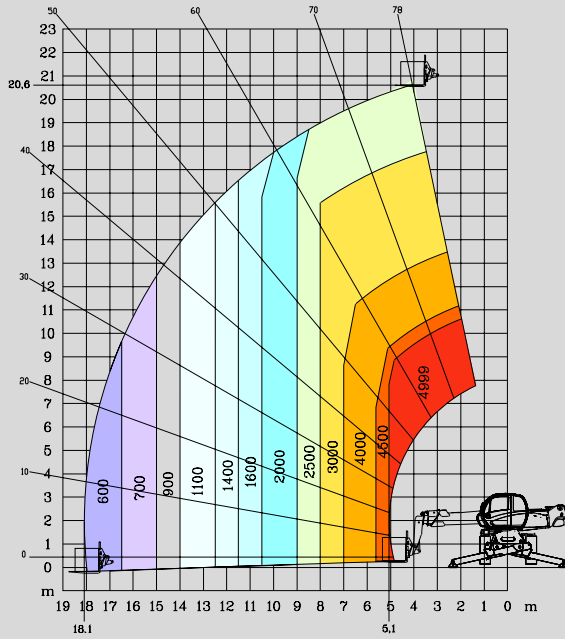


**FRONTAL POSITION ON WHEELS
WITH FORKS**

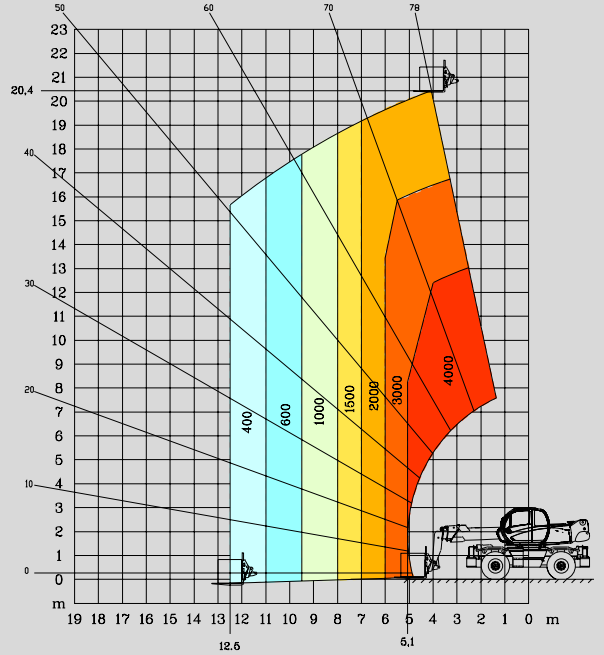


**ROTATION ON STABILISERS NOT FULLY EXTENDED
WITH FORKS**

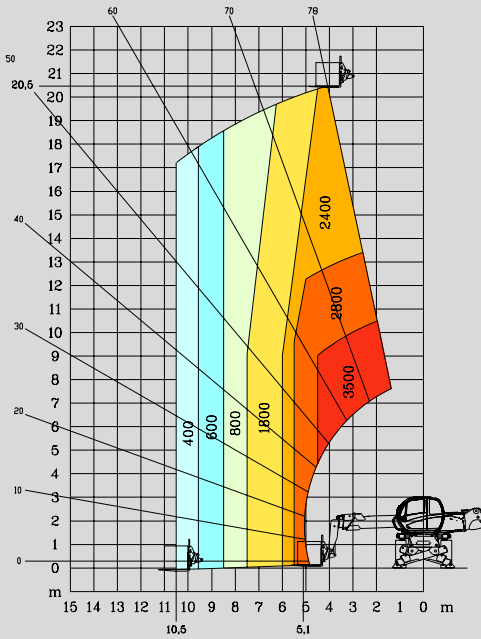


**ROTATION ON STABILISERS FULLY EXTENDED
WITH 5T WINCH**

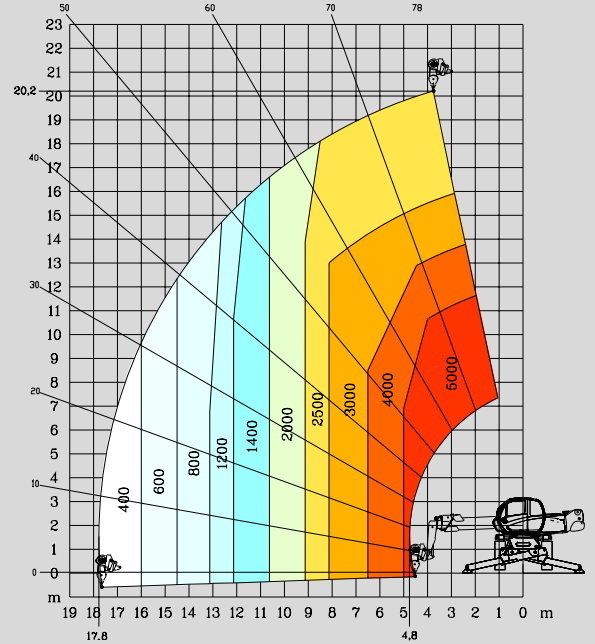


**ROTATION ON STABILISERS FULLY EXTENDED
WITH JIB P 600**

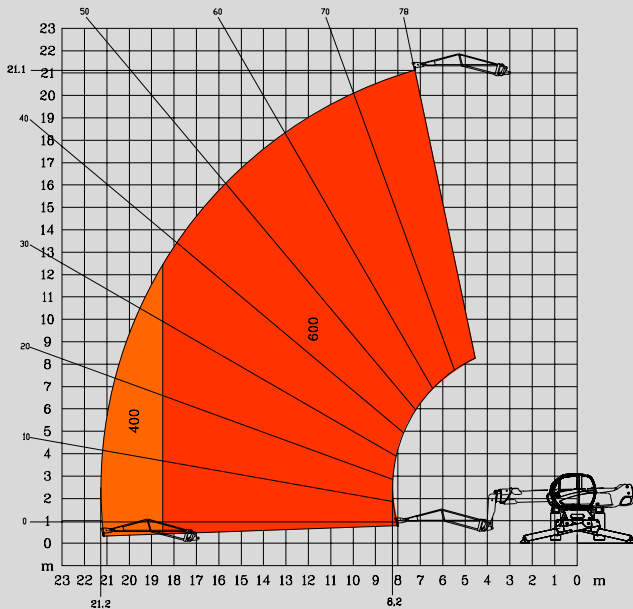


**ROTATION ON STABILISERS FULLY EXTENDED
WITH JIB P 1500**

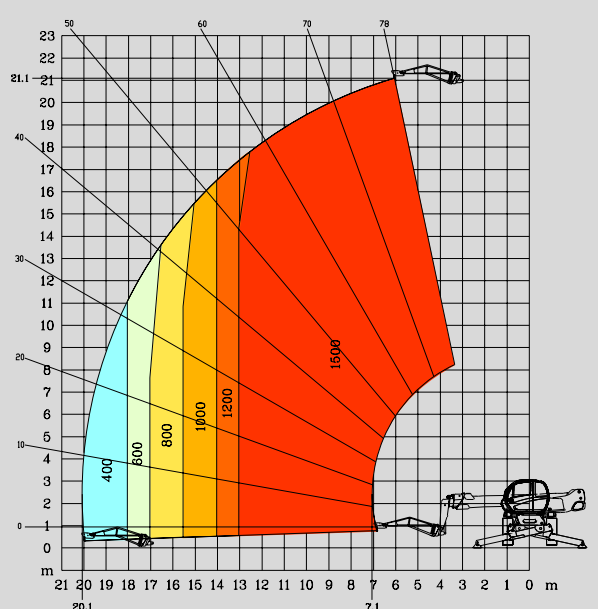


**ROTATION ON STABILISERS FULLY EXTENDED
WITH EXTENSIBLE PLATFORM 2,25/4 m**

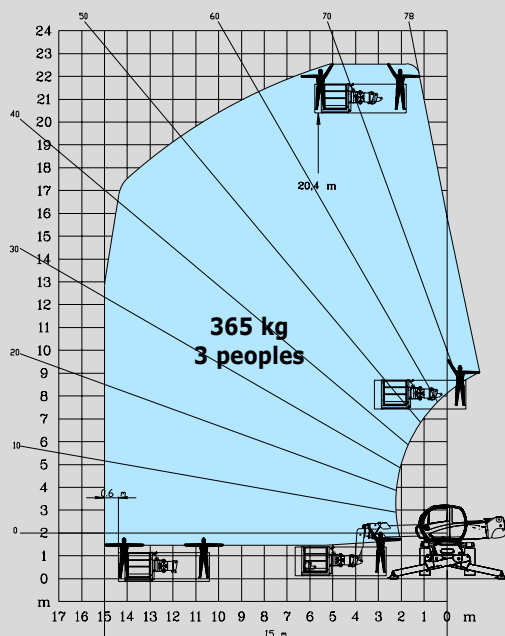


**ROTATION ON STABILISERS FULLY EXTENDED
WITH 1000 KG PLATFORM 2,25/4 m**

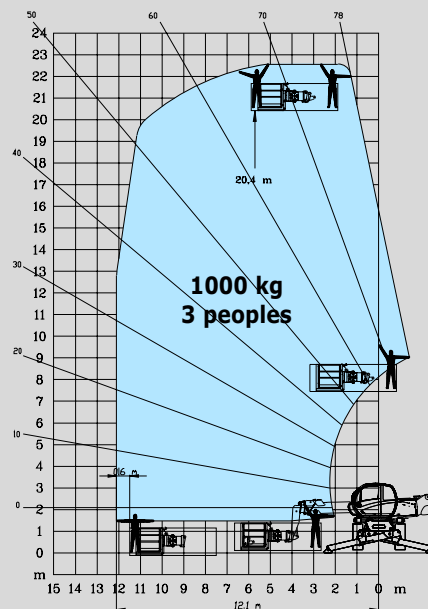


**ROTATION ON STABILISERS FULLY EXTENDED
WITH 3 D SYSTEM IN POSITIVE POSITION**

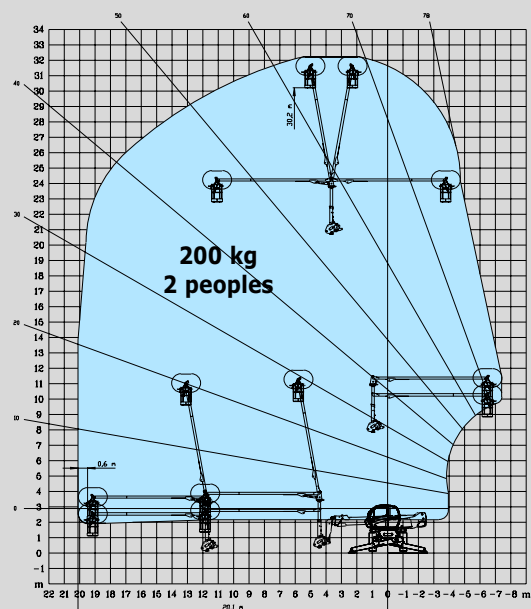


**ROTATION ON STABILISERS FULLY EXTENDED
WITH 3 D SYSTEM IN NEGATIVE POSITION**

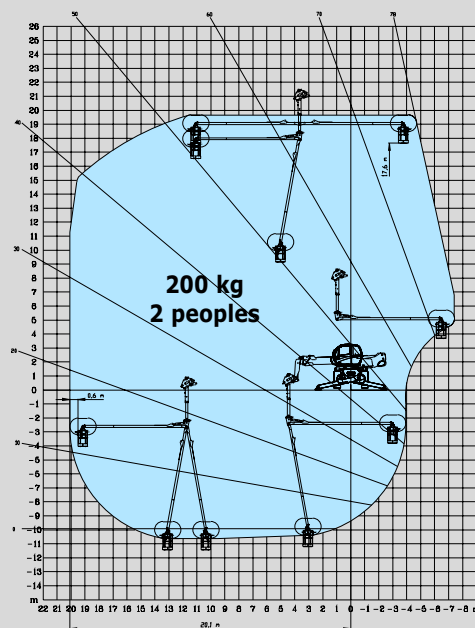

**ROTATION ON STABILISERS FULLY EXTENDED
WITH AERIAL JIB PLATFORM**

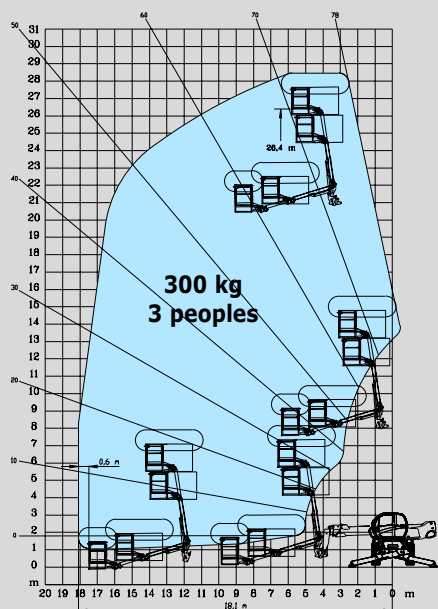

**ROTATION ON STABILISERS FULLY EXTENDED
WITH CRANE JIB**

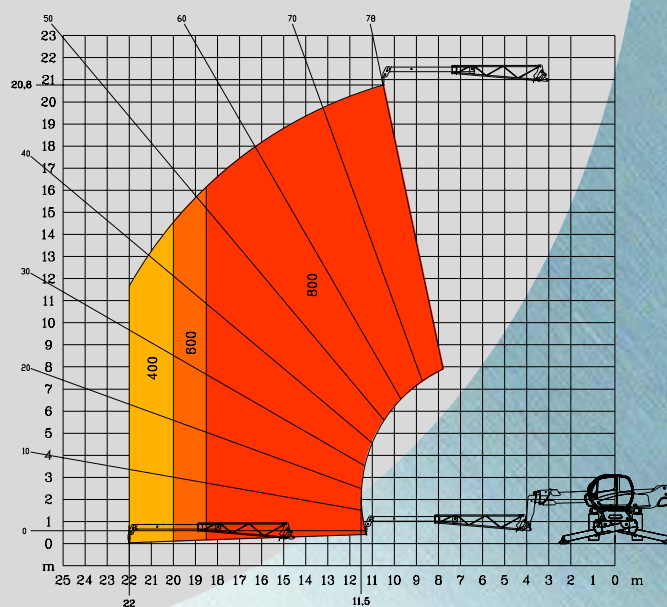

MRT 2150 *PRIVILEGE*



Lift capacity (on stabilisers)4999 kg
at 500 mm from forks heels



Lift height :20.60 m



Tyres
18 - 22,5



Forks(mm)
Length1200
Width x thickness150 X 50



Multidisc brakes : hydraulically assisted on both axles
Negative parking brake



Engine Mercedes-Benz

TypeOM 904 LA (EURO 3)
Capacity4 cyl. 4250 cm³
Power (ISO/TR 14396)150 HP/110 kw
580 Nm of 1200 at 1600 rpm
Water cooling
Direct injection



Transmissionhydrostatic
With automatic power regulation (hydraulic variable
displacement pump and motor)
Reversing shiftelectromagnetic
2 speed forward and reverse
Travel speed36 km/h*
*This speed may be limited by local regulations



Rear axle
Frame levelling on front axle +/- 8° (15%)
Automatic rear axle locking system
over 15° rotation



4 stabilizers
simultaneous or individually controlled



Total and continuous rotation
Turret mounted on a double slew ring
Hydraulic and electric rotation



Hydraulics
3 pumps gear type270 bars/160 l/mn



Control :2 electro proportional control joysticks for all
hydraulic movements






Capacities
Cooling system18 l.
Engine oil15 l.
Hydraulic oil200 l.
Fuel tank230 l.



Weight unladen (with forks)16095 kg
Overallwidth2.43 m
Overallheight3.05 m
Overalllength6.78 m
Ground clearance0.37 m
Drawbar pull8200 daN



Standard load moment indicator
(mobile crane standards)

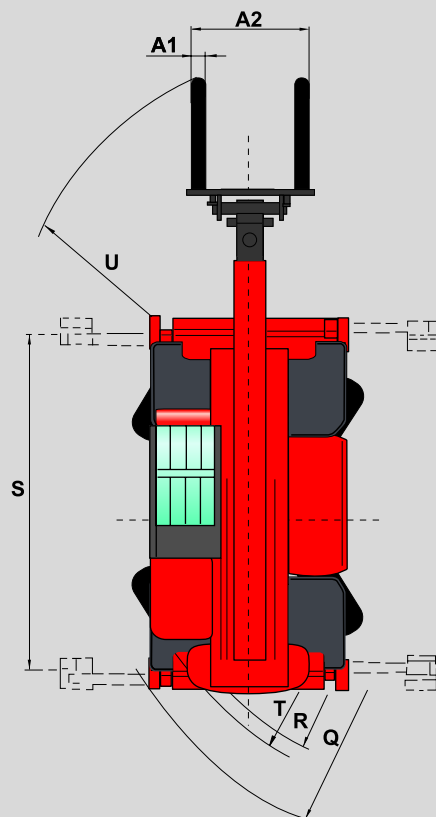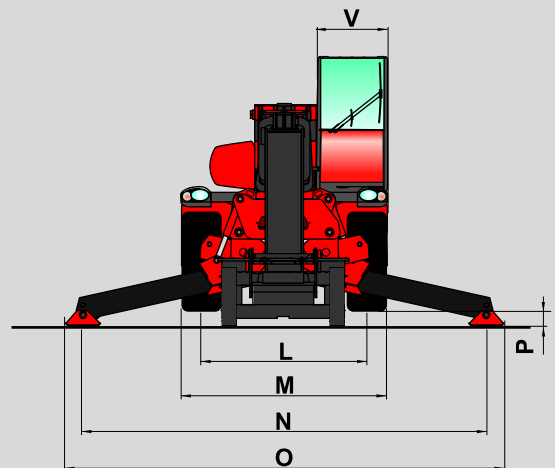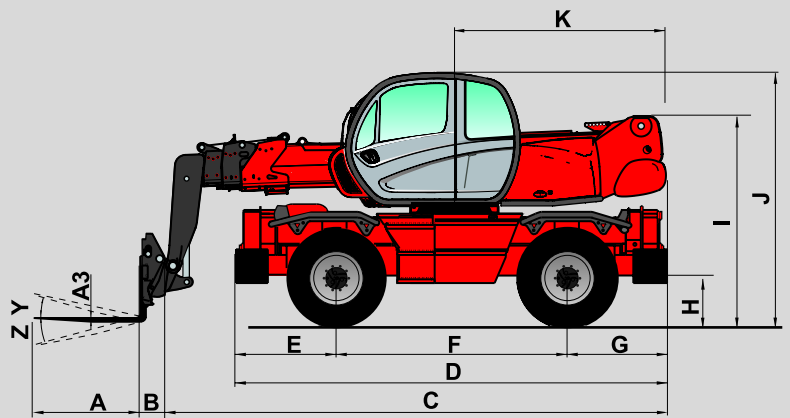

A	1200
A1	150
A2	1320
A3	50
B	290
C	6490
D	5050
E	1155
F	2750
G	1155
H	380
I	2485
J	3050
K	2485
L	1930
M	2425
N	4700
O	5100
P	150
Q	4500
R	3800
S	4550
T	4040
U	6230
V	950
Y	12°
Z	105°

mm

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700384EN-A - 04/07

